



INTERFACE FOR DAKTRONICS TOUCHPADS TO CTS TIMER SPECIFICATIONS

This interface allows the use of Daktronics touchpads with a CTS timer. The CTS deck cable plugs into the back of the interface box. The interface cable (included) plugs into standard connections on the CTS timing console. One interface per deck cable is required.

PRODUCT SPECIFICATIONS

PRODUCT SAFETY APPROVAL:

ETL listed and tested to CSA standards
CE label pending

DIMENSIONS:

Height 3", Width 8", Depth 11" (76 mm, 203 mm, 279 mm)

WEIGHT:

4 lb. (2 kg)

POWER:

12 V AC, 5 W, built in battery backup will operate the interface for approximately one hour and will only function upon loss of power during normal operation. The battery recharges in 12 hours maximum.

CONSTRUCTION:

Rugged plastic case, metal 50 pin Centronics Connectors with latches

INDICATORS:


PWR (power) indicator is a green LED, BAT CHG (battery charge) is a red LED and the BAT BKUP (battery backup) is an audible signal beep

CABLING:

A 6' (1829 mm) connection cable between the interface and the CTS timer is provided by Daktronics. The existing deck cabling for the touchpads and push buttons plug into the timer interface.

WARRANTY/ SERVICE PLAN:

Exclusive Daktronics Gold plan in the U.S. and Canada
(see SP10093 for more information).

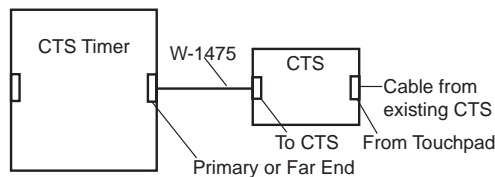

For more information about Daktronics scoring/timing products, call 605-697-4300 or 800-325-8766.

Gold® is a registered trademark of its owner.

SL052807-04964 Page 1 of 1 Copyright © 2003-2007 Daktronics, Inc.

For faster service call the appropriate sales group toll-free:

800-DAKTRONICS (800-325-8766) General Sales
888-DAK SCORE (888-325-7267) High School/Park & Rec Sales
888-DAK SIGN (888-325-7446) Commercial Sales
800-558-9526 Business Communications Sales
888-DAK TIME (888-325-8463) College/University Sales
888-CHRONDEK (888-247-6633) Auto Racing Sports

