



STEP 1
 PULL CABLE APPROX. 3 FEET OUT OF J-BOX. STRIP OUTSIDE INSULATION APPROX. 4 INCHES & EACH INDIVIDUAL WIRE INSULATION APPROX. 1/4".

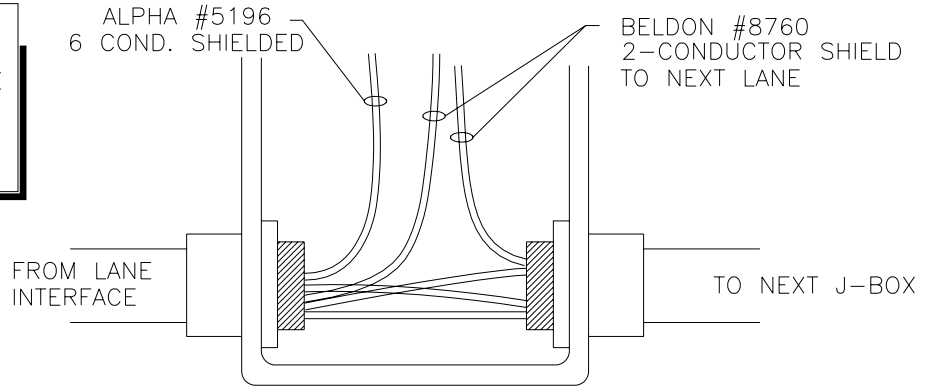


STEP 2
 TWIST THE WIRES TOGETHER, SOLDER, AND SCREW ON A WIRE NUT TO INSULATE.

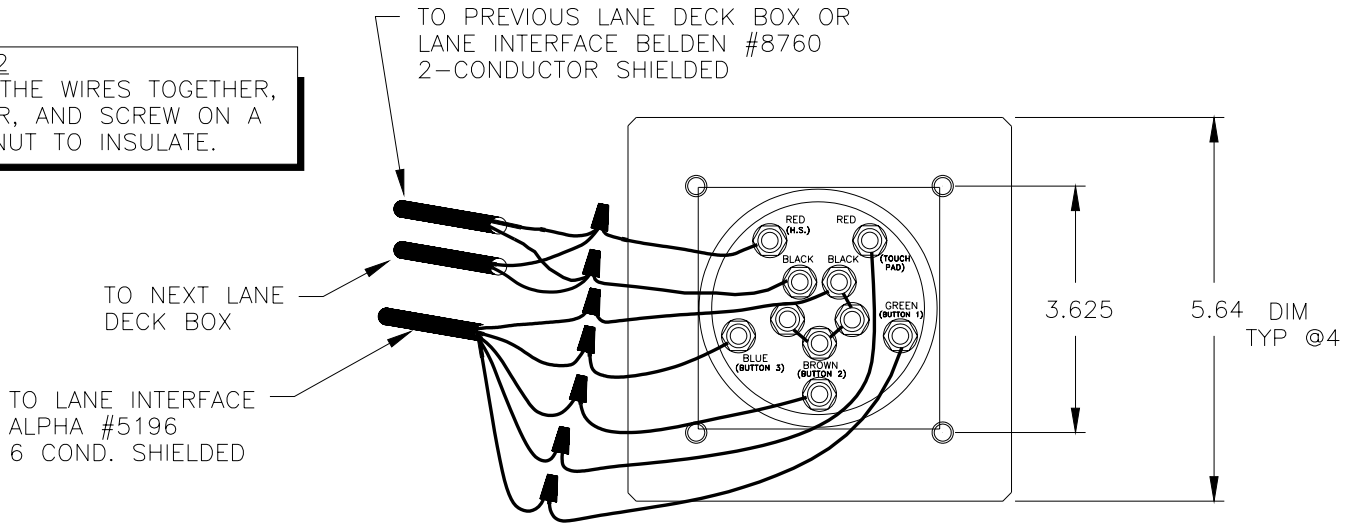


STEP 3
 CONNECT THE TIMER & ALL CABLING. TEST THE ENTIRE SYSTEM. IF EVERYTHING TESTS OKAY, CONTINUE TO STEP 4.

STEP 4
 COIL APPROX. 10" OF WIRE INTO POTTING CUP. POUR THE POTTING COMPOUND INTO THE CUP COVERING ALL THE WIRES. FOLLOW THE INSTRUCTIONS ON THE POTTING COMPOUND FOR MIXING & SET UP TIME.

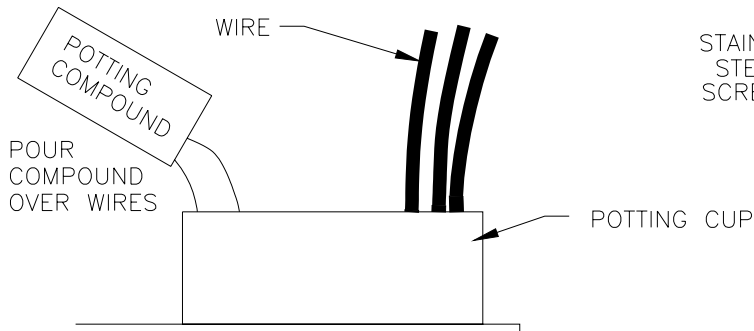

STEP 5
 AFTER THE POTTING COMPOUND IS SET, PLACE THE COVER ONTO THE J-BOX USING THE STAINLESS STEEL SCREWS THAT COME WITH THE J-BOX. MAKE SURE THE GASKET IS IN PLACE.

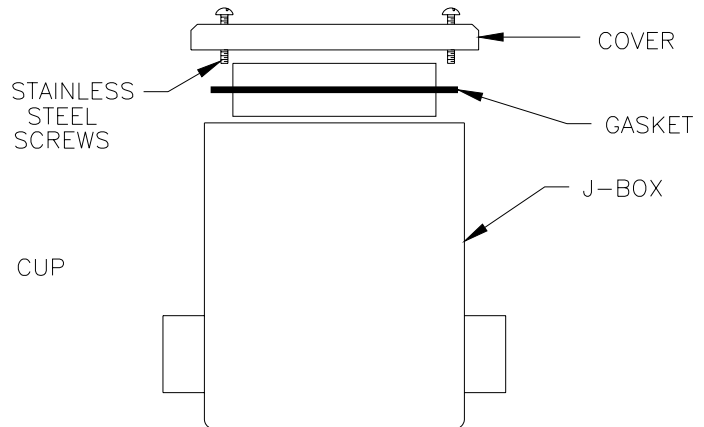

REV.	DATE	DESCRIPTION	BY	APPR.
10	21 JUN 01	CHANGED PROJECT NAME	GWS	GWS
9	6MAR00	UPDATED DIMENSIONS	RASMUS	JW
8	28 JULY 99	CHANGED CABLE REQUIREMENTS AND ADDED SCALE.	HBB	

DAKTRONICS, INC. BROOKINGS, SD 57006	
PROJ: OMNISPORT	
TITLE: INDIVIDUAL LANE DECK PLATE INSTALLATION	
DES. BY: D. BIERSCHBACH	DRAWN BY: S. WHALEN
DATE: 8DEC89	
REVISION	APPR. BY:
10	NONE
SCALE:	NONE

1056-R11A-26288