


DIMENSIONS ARE IN INCHES [MILLIMETERS]

THIS IS A SINGLE FACED DROP-IN DISPLAY, TO BE MOUNTED IN ONE OF TWO WAYS:

1. FOR DROP-IN MOUNTING, INSERT THE DISPLAY INTO A RECTANGULAR OPENING IN A SIGN FACE. USE THE HOLES IN THE FRONT FLANGES TO ATTACH THE DISPLAY TO THE SIGN FACE, USING APPROPRIATE HARDWARE.
2. FOR REAR ATTACHMENT, USE THE THREADED INSERTS IN THE REAR TO MOUNT TO SUPPORT STRUCTURE, USING 1/2 - 13 BOLTS.

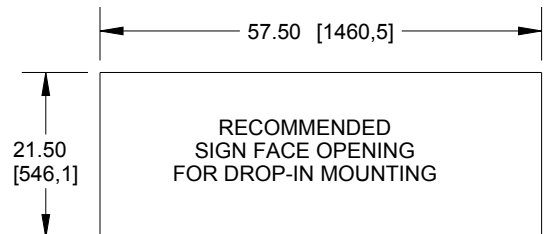

DAKTRONICS IS NOT RESPONSIBLE FOR THE MOUNTING STRUCTURE OR FOR THE ADEQUACY OF ATTACHMENT TO THE STRUCTURE. STRUCTURE AND ATTACHMENT MUST CONFORM TO ALL APPLICABLE BUILDING CODES.

THE OVERALL SIGN STRUCTURE MUST BE DESIGNED WITH SUFFICIENT VENTILATION SO THAT AIR AROUND THE DISPLAY DOES NOT EXCEED 120°F [49°C].


THE DISPLAY IS FRONT VENTILATED. NO PORTION OF THE FACE MAY BE COVERED.

SIGNAL INTERCONNECT CABLES ARE PROVIDED AND MUST BE ROUTED AND CONNECTED WHEN MULTIPLE DISPLAYS ARE INSTALLED WITHIN A SINGLE SIGN.

THIS DISPLAY IS UL LISTED.

REFER TO THE DISPLAY MANUAL FOR COMMUNICATION OPTIONS AND INSTALLATION INSTRUCTIONS.

FEATURE	
DIGIT HEIGHT	18" [457 mm]
DIGIT LED COLOR	RED OR AMBER
CABINET COLOR	SEMI-GLOSS BLACK
SERVICE ACCESS	FRONT ONLY
CABINET MATERIAL	0.063 [1.6] ALUMINUM SHEET
EST. WEIGHT	45 lb [20 kg]
MAX. OPER. TEMP.	120°F [49°C]
PRIMARY VOLTS	120V AC
MAX. POWER	130 W

 DAKTRONICS, INC. BROOKINGS, SD 57006		THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2013 DAKTRONICS, INC.				
DO NOT SCALE DRAWING						
PROJ: DATETIME DISPLAYS						
TITLE: SHOP DRAWING, DF-1012-18-DI/SF, 120V						
DESIGN: A VANBEMMEL		DRAWN: A VANBEMMEL		DATE: 01-MAY-13		
SCALE: 4/100						
SHEET:		REV		JOB NO:		FUNC-TYPE-SIZE
1 OF 1		00		P 1279		R - 08 - A
						1130600

REV	DATE:	BY:
-----	-------	-----