


DAKTRONICS SSP-100 PRODUCT SPECIFICATIONS



Integrated handles for easy transport/setup

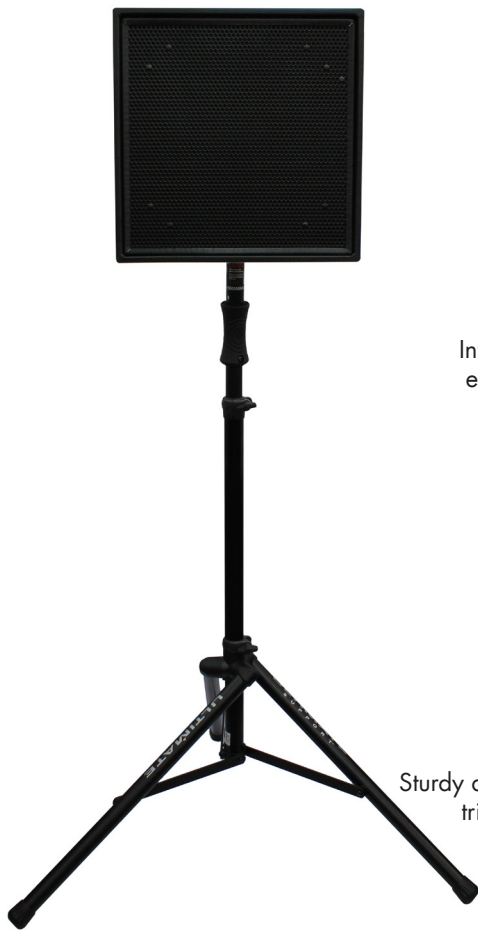

Sturdy air-assisted tripod

The Sportsound® SSP-100 portable speaker system is designed to provide high speech intelligibility and reproduce full-range music wherever it's needed, indoors or out. Built-in amplifier offers **Bluetooth®** wireless technology to connect to smart phones, tablets, or laptops while XLR inputs allow wired connection to included microphone as well as Daktronics audio control racks.

	SPEAKER CABINET	TRIPOD
DIMENSIONS	18.25" H x 18.25" W x 15" D (464 mm, 464 mm, 381 mm)	Height: 3'-8" (1.12 m) to 6'-7" (2.01 m) Diameter: 5.5" (140 mm) to 3'-11" (1.19 m)
WEIGHT	44 lb (20 kg)	12 lb (5.5 kg)
POWER	800 Watts	N/A
CONSTRUCTION	Copolymer Polypropylene	Aluminum
COLOR	Black	Black

WWW.DAKTRONICS.COM E-MAIL: SALES@DAKTRONICS.COM

201 Daktronics Drive, PO Box 5128, Brookings, SD 57006
Phone: 1-800-325-8766 or 605-692-0200 Fax: 605-697-4746
DD4935995 091421 Page 1 of 2



DAKTRONICS SSP-100 PRODUCT SPECIFICATIONS

KEY FEATURES

- Durable sound cabinet protects internal speaker and internal amplifier components
- Protective cover for inclement weather and safe storage
- Pressurized gas shock in tripod lifts speaker with little effort
- Sets up and tears down in minutes
- Built-in overload protection and peak limiters
- Pre-configured crossover and equalization
- Compatible with any Daktronics audio control system (see [DD2367302](#))
- Included wired microphone and XLR cable

GRILLE

Perforated black metal grille with acoustically-transparent, hydrophobic fabric and reticulated foam barrier

FREQUENCY RESPONSE (+/- 3 DB @ 1 M)

58 Hz to 13.6 kHz

COVERAGE

Horizontal = 80 degrees; Vertical = 80 degrees

MAX CONTINUOUS SPL @ 1 M

130 dB

CROSSOVER POINTS

2000 Hz

SPEAKER

- **Drivers:** One (1) 14" (356 mm) coaxial driver with 3" (76 mm) voice coil; 800 W LF, 160 W HF

AMPLIFIER

- 2 Channels; 600 W for low frequencies, 200 W for high
- Built-in 2-channel mixer
- 2 XLR or 1/4" inputs; 1 XLR output
- Frequency Response: 20 Hz to 20 kHz
- Total Harmonic Distortion (full rated power): 0.01%
- On-board Digital Signal Processing (DSP)
- IEC Power Connector: 15 A IEC



FOR ADDITIONAL INFORMATION

- Quick Guide: See [DD4941643](#)