


ADDRESS PLUG
WIRE SIDE

WIRING DIAGRAM

DRIVER ADDRESS PLUG
WITH ALL WIRES
CONNECTED

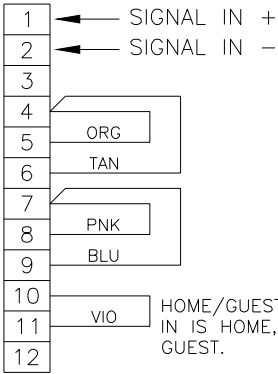

HOME/GUEST JUMPER.
IN IS HOME, CUT IS
GUEST.

WIRING DIAGRAM

TNMC ADDRESS PLUG
WITH ALL WIRES
CONNECTED

KEY: 0 = PIN N/C
1 = PIN CONNECTED

		PIN 12	PIN 11	PIN 9	PIN 8	PIN 6	PIN 5	PIN 3	PIN 2
(DRIVER) COURT 1	11	0	0	0	0	1	0	1	1
COURT 2	12	0	0	0	0	1	1	0	0
COURT 3	13	0	0	0	0	1	1	0	1
COURT 4	14	0	0	0	0	1	1	1	0
COURT 5	15	0	0	0	0	1	1	1	1
COURT 6	16	0	0	0	1	0	0	0	0
COURT 7	17	0	0	0	1	0	0	0	1
COURT 8	18	0	0	0	1	0	0	1	0
COURT 9	29	0	0	0	1	1	1	0	1
COURT 10	30	0	0	0	1	1	1	1	0
COURT 11	31	0	0	0	1	1	1	1	1
COURT 12	32	0	0	1	0	0	0	0	0
COURT 13	33	0	0	1	0	0	0	0	1
COURT 14	34	0	0	1	0	0	0	1	0
COURT 15	35	0	0	1	0	0	0	1	1
COURT 16	36	0	0	1	0	0	1	0	0
COURT 17	37	0	0	1	0	0	1	0	1
COURT 18	38	0	0	1	0	0	1	1	0

DUAL 1 TEAM SCORE/TOD	20	0	0	0	1	0	1	0	0
DUAL 2 TEAM SCORE/TOD	21	0	0	0	1	0	1	0	1

NOTE: ADD 22 IS NOT USED, RESERVED FOR OTHER THINGS

DUAL 3 TEAM SCORE/TOD	23	0	0	0	1	0	1	1	0
-----------------------	----	---	---	---	---	---	---	---	---

		PIN 12	PIN 11	PIN 9	PIN 8	PIN 6	PIN 5	PIN 3	PIN 2
(TNMC) COURT 1	221	0	0	0	1	0	0	0	0
COURT 2	222	0	0	1	0	0	0	0	0
COURT 3	223	0	0	1	1	0	0	0	0
COURT 4	224	0	1	0	0	0	0	0	0
COURT 5	225	0	1	0	1	0	0	0	0
COURT 6	226	0	1	1	0	0	0	0	0
COURT 7	227	0	1	1	1	0	0	0	0
COURT 8	228	1	0	0	0	0	0	0	0
COURT 9	229	1	0	0	1	0	0	0	0
COURT 10	231	1	0	1	1	0	0	0	0
COURT 11	232	1	1	0	0	0	0	0	0
COURT 12	233	1	1	0	1	0	0	0	0

NOTE: COURTS ABOVE 13 DO NOT SUPPORT TNMCS

DUAL 1 TEAM SCORE/TOD	230	1	0	1	0	0	0	0	0
DUAL 2 TEAM SCORE/TOD	234	1	1	1	0	0	0	0	0

SINGLE COURT MODELS

MODEL	ADDRESS		VOLTAGE	VINYL CAPTIONS		TNMC PAIR 6" (3/4)		TNMC PAIR 8" (1)	
				WATTS	AMPS	WATTS	AMPS	WATTS	AMPS
TN-2501, 2502	A1	*11	120V	200	1.7	N/A	N/A	N/A	N/A
			240V		0.9		N/A		N/A
TN-2503, 2504	A1	*11	120V	200	1.7	300	2.5	400	3.3
			240V		0.9		1.3		1.7

NOTES

A SINGLE COURT SCOREBOARD, SOLD AS COURT 1 ONLY, SHOULD BE SET WITH ADDRESS 11 (DRIVER) AND 221 (TNMC) IN MANUFACTURING.

IF SEVERAL SINGLE COURT SCOREBOARDS ARE SOLD, THEY WILL NEED TO BE DESIGNATED COURT 1, 2, 3, ETC. THEN SET THE ADDRESSES FOR THE SCOREBOARDS TO MATCH THE COURT NUMBER, IN MANUFACTURING.

MULTI COURT MODELS

TN-2560 THRU TN-2563 ARE MULTI-SECTIONAL SCOREBOARD MODELS. THEY ARE MADE UP OF SEVERAL SINGLE COURT ASSEMBLIES, BUT NEED TO HAVE THE ADDRESS SETTINGS CONFIGURED FOR EACH COURT IT WILL REPRESENT. SEE LEFT DETAILS FOR INSTRUCTIONS.


NO POWER INFORMATION CHANGES REQUIRED.

NOTES

A SINGLE COURT SCOREBOARD, SOLD AS COURT 1 ONLY, SHOULD BE SET WITH ADDRESS 11 (DRIVER) AND 221 (TNMC) IN MANUFACTURING.

IF SEVERAL SINGLE COURT SCOREBOARDS ARE SOLD, THEY WILL NEED TO BE DESIGNATED COURT 1, 2, 3, ETC. THEN SET THE ADDRESSES FOR THE SCOREBOARDS TO MATCH THE COURT NUMBER, IN MANUFACTURING.

MULTI COURT SCOREBOARD MODELS, TN-2560 THRU TN-2563 ARE SEVERAL SINGLE COURT SECTIONS AND A TEAM SCORE/TOD SECTION. AGAIN, ALL THE SECTIONS WILL NEED TO BE DESIGNATED AND THEN SET THE ADDRESSES FOR THE SCOREBOARDS TO MATCH.

REV 01	DATE: 10 SEP 13	UPDATED DRAWING TO BE A POWER AND ADDRESS DOCUMENT				BY: MWM	
		DAKTRONICS, INC. BROOKINGS, SD 57006		THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2013 DAKTRONICS, INC.			
DO NOT SCALE DRAWING							
PROJ: TENNIS SCOREBOARDS							
TITLE: POWER AND ADDRESS DETAILS; INDOOR TENNIS SCOREBOARDS							
DESIGN: KBIERBA			DRAWN: KBIERBA			DATE: 24 MAY 11	
SCALE: NONE							
SHEET		REV	JOB NO:		FUNC - TYPE - SIZE		1054354
		01	P 1164		E - 03 - B		