

TNMC ADDRESSING INFORMATION ONLY USED WITH SCOREBOARDS THAT ARE RECEIVING SIGNAL FROM DAKTRONICS TENNIS ONLY

SINGLE-COURT MODELS				VINYL CAPTIONS		8X32 34MM TNMC	
MODEL	ADDRESS	VOLTAGE	FREQUENCY	WATTS	AMPS	WATTS ALL COLOR	AMPS ALL COLOR
TN-2605, TEAM SCORE, OPT. TOD	A1	20	100-240V~1P	300	3 - 1.3	570	5.7-2.4
	TNMC	230					

DRIVER ADDRESS
100-240V~1P IS FOR STANDARD SCOREBOARDS AND OVERSEAS / INTERNATIONAL SCOREBOARDS

SPECIFICATION LABEL INFORMATION


MANUFACTURING ADDRESSING NOTE:
REFERENCE DWG-1198765 FOR ROTARY SWITCH ADDRESSING INSTRUCTIONS.

COURT	DRIVER ADDRESS
COURT 1	11
COURT 2	12
COURT 3	13
COURT 4	14
COURT 5	15
COURT 6	16
COURT 7	17
COURT 8	18
COURT 9	29
COURT 10	30
COURT 11	31
COURT 12	32
COURT 13	33
COURT 14	34
COURT 15	35
COURT 16	36
COURT 17	37
COURT 18	38
DUAL 1 TOD/TEAM SCORE	20
DUAL 2 TOD/TEAM SCORE	21
DUAL 3 TOD/TEAM SCORE	23

NOTE: ADDRESS 22 IS NOT USED, RESERVED FOR OTHER ITEMS

- NOTE:
- SCOREBOARD WILL BE ADDRESSED TO COURT 1 BY DEFAULT FROM MANUFACTURING
 - DUAL TOD/TEAM SCORE SETTINGS WILL BE SET PER CUSTOMER REQUEST BASIS ON INSTALLATION
 - A SINGLE COURT SCOREBOARD, SOLD AS COURT 1 ONLY, SHOULD BE SET WITH ADDRESS 1 (DRIVER) AND 221 (TNMC) IN MANUFACTURING.
 - IF SEVERAL SINGLE COURT SCOREBOARDS ARE SOLD, THEY WILL NEED TO BE DESIGNATED COURT 1, 2, 3, ETC. THEN SET THE ADDRESSES FOR THE SCOREBOARDS AND OPTIONAL TNMCS, TO MATCH THE COURT NUMBER, IN MANUFACTURING.

FOR THE TNMC CONTROLLER

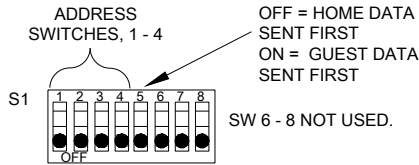

SELECTS HOME/TOP (0)
OR GUEST/BOTTOM (1)

		SWITCH SP4	SWITCH SP3	SWITCH SP2	SWITCH GST	SWITCH 8	SWITCH 4	SWITCH 2	SWITCH 1
(TNMC) COURT 1	221					0	0	0	0
COURT 2	222					0	0	0	1
COURT 3	223					0	0	1	0
COURT 4	224					0	0	1	1
COURT 5	225					0	1	0	0
COURT 6	226					0	1	0	1
COURT 7	227					0	1	1	0
COURT 8	228					0	1	1	1
COURT 9	229					1	0	0	0
COURT 10	231					1	0	1	0
COURT 11	232					1	0	1	1
COURT 12	233					1	1	0	0
DUAL 1 TOD/TEAM SCORE	230					1	0	0	1
DUAL 2 TOD/TEAM SCORE	234					1	1	1	0

NOTE: COURTS ABOVE 13 DO NOT SUPPORT TNMCS

SELECTS HOME/TOP (0)
OR GUEST/BOTTOM (1)


DISPLAY ADDRESSING LISTED BELOW IS USED WITH BOTH INDEPENDANT CONTROL OF DISPLAY WITH AN RC-100 AND LOCAL BASE STATION OR THROUGH WIRED COMMUNICATIONS BACK TO DAKTRONICS TENNIS SYSTEM BASE STATION WHICH RECEIVES SIGNAL FROM COURT RC-100'S

MODEL	ADDRESS	VOLTAGE	FREQUENCY	VINYL CAPTIONS		8X32/8X48/8X64 34MM TNMC	
				WATTS ALL COLOR	AMPS ALL COLOR	WATTS ALL COLOR	AMPS ALL COLOR
	A1	*11	100-240V~1P	50/60HZ	300	3 - 1.3	-
TN-2603, 2604, 2606, 2607, 2609	A1	*11	100-240V~1P	50/60HZ	300	3 - 1.3	570 5.7-2.4

MULTI-COURT MODELS

GENERAL POWER CONSUMPTION NOTES:
1. SYSTEM VOLTAGE 100-240V, 3 WIRES + GND, 2 POLES.
2. *AMPERES PER LINE.

MODEL	ADDRESS	VOLTAGE	FREQUENCY	VINYL CAPTIONS		8X32 34MM TNMC TOP SECTION		8X32 34MM TNMC ALL SECTIONS	
				WATTS ALL COLOR	AMPS ALL COLOR	WATTS ALL COLOR	AMPS ALL COLOR	WATTS ALL COLOR	AMPS ALL COLOR
TN-2650, 2651, 2652, 2653, 2654, 2655, 2656, 2657	A1	20	100-240V~1P	50/60HZ	2100	*10.5	2400	*12	4200
	A2	11	100-240V~1P	50/60HZ					
	A3	12	100-240V~1P	50/60HZ					
	A4	13	100-240V~1P	50/60HZ					
	A5	14	100-240V~1P	50/60HZ					
	A6	15	100-240V~1P	50/60HZ					
	A7	16	100-240V~1P	50/60HZ					



ASSY NO.
SER. NO.
MFG DATE
DAKTRONICS, INC.

0A-XXXX-XXXX HREV:
SN:
MFG DATE:
WO:

TN-2605-XXXX-XX
100-240V~1P; 3A
MAX WATTS: 300W
50 / 60HZ

LL-2306

BASE STATION INSTALLATION LOCATION AND RADIO CHANNEL SETUP FOR RC-100 CONTROLLER DISPLAYS (NO TNMC'S)


INDIVIDUAL DISPLAY RADIO SETUP

CONSOLE	GROUP	CHANNEL	DISPLAY ADDRESS
1	2	1	11
2	2	2	11
3	2	3	11
4	2	4	11
5	2	5	11
6	2	6	11
7	2	7	11
8	2	8	11
9	2	9	11
10	2	10	11
11	2	11	11
12	2	12	11

BASE STATION INSTALLATION LOCATION AND RADIO CHANNEL SETUP FOR DAKTRONICS TENNIS SYSTEM SIGNAL FEED TO DISPLAYS WITH TNMC'S AND RC-100 COURT CONTROL

- DAKTRONICS TENNIS SYSTEM CAN ONLY DRIVE UP TO 15 TNMC'S. IF YOUR FACILITY SETUP HAS MORE THEN 12 COURTS THAT REQUIRE TNMC INFORMATION. A SECOND DAKTRONICS TENNIS SIGNAL FEED WILL BE REQUIRED TO SEND TNMC INFORMATION TO THESE COURTS
- EACH DAKTRONICS TENNIS SYSTEM WILL DISPLAY 12 COURTS OF TNMC DATA ALONG WITH HOME AND GUEST TEAM NAME INFORMATION FOR MULTI COURT SYSTEMS

CONSOLE	GROUP	CHANNEL	DISPLAY ADDRESS
1	1	1	11
2	1	2	12
3	1	3	13
4	1	4	14
5	1	5	15
6	1	6	16
7	1	7	17
8	1	8	18
9	1	9	19
10	1	10	20
11	1	11	21
12	1	12	22



THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2016 DAKTRONICS, INC. (USA)

THIRD ANGLE PROJECTION

PROJECT: TENNIS SCOREBOARDS

TITLE: PWR AND ADD DETAILS; OUTDOOR TENNIS SCOREBOARDS

DATE: 28 JAN 15

DIM UNITS: INCHES [MILLIMETERS]

SHEET

REV 02

SCALE: NONE

DO NOT SCALE DRAWING

DESIGN: SCOLGROVE

JOB NO. P1164

FUNC - TYPE - SIZE E - 01 - B

1202417

DRAWN: SCOLGROVE

REV 02	DATE: 25 APR 17	PER EC-24206, UPDATE SOMETIME PER EC-19683	BY: MTR
REV 01	DATE: 21 APR 16	ADDED NOTE ON ADDRESSING FROM MANUFACTURING PER EC-19683	BY: CLT